


HSB-HTS SERIES

Different voltages for your choice/Reliable products for your standby genset/
Up to 25KW/Customize your H class alternator for UL approval

Reference Picture

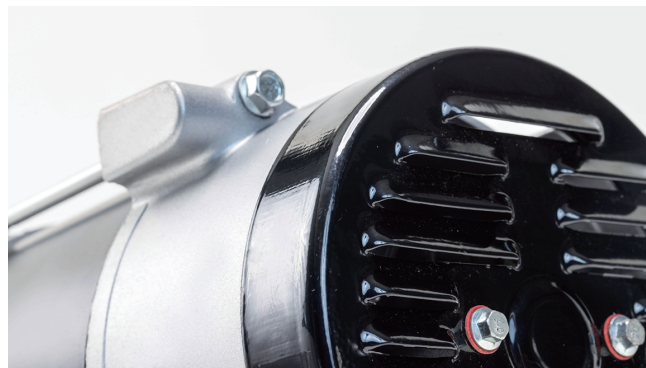

General Characteristics

| MODEL | RATED POWER (KW) | MAX POWER (KW) | VOLTAGE (V) | FREQUENCY (Hz) | PHASE | POLES | EXCITING MODE | THD | SHAFT TAPER | INSULATION CLASS | PROTECTION LEVEL |
|--------|------------------|----------------|-------------------|----------------|-----------------|-------|----------------------|-----|-------------|------------------|------------------|
| HTS02H | 12.0 | 13.0 | 230V or 120V/240V | 50Hz 60Hz | Single or Three | 2 | Brushed or Brushless | 5% | 1:5 | CLASS H | IP23 |
| HTS04H | 14.0 | 15.0 | 230V or 120V/240V | 50Hz 60Hz | Single or Three | 2 | Brushed or Brushless | 5% | 1:5 | CLASS H | IP23 |
| HTS05H | 16.0 | 18.0 | 230V or 120V/240V | 50Hz 60Hz | Single or Three | 2 | Brushed or Brushless | 5% | 1:5 | CLASS H | IP23 |
| HTS07H | 18.0 | 20.0 | 230V or 120V/240V | 50Hz 60Hz | Single or Three | 2 | Brushed or Brushless | 5% | 1:5 | CLASS H | IP23 |
| HTS08H | 20.0 | 22.0 | 230V or 120V/240V | 50Hz 60Hz | Single or Three | 2 | Brushed or Brushless | 5% | 1:5 | CLASS H | IP23 |

Dimensions Reference

